
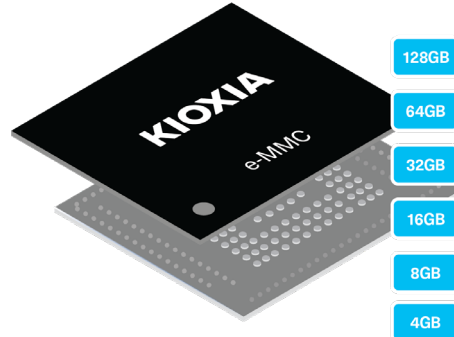


Managed Flash Memory Solutions

Universal Flash Storage (UFS) and e-MMC

Our UFS (Universal Flash Storage) and e-MMC Managed Flash solutions integrate flash memory and a KIOXIA controller in a single package. An ideal replacement for e-MMC, UFS combines the high performance, power efficiency and enhanced reliability demanded by mobile applications, including smartphones, tablets, AR/VR, automotive and more.

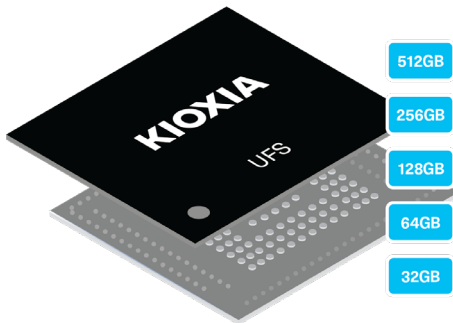

DESIGN CONSIDERATIONS

Use UFS when:

- Higher densities are needed (from 32GB to 512GB)
- Enhanced performance is required
- SoC supporting UFS interface is available
- Recommend v2.1 for 32/64GB and v3.1 for 128GB and above

Use e-MMC when:

- Lower densities are needed (from 4GB to 128GB)
- SoC supporting UFS interface is not available

WHAT'S NEW:

- Demand recovering, supply/demand becoming more balanced
- Lead time: Stock to 12 weeks

UFS KEY FEATURES

- KIOXIA controller
- Serial interface
- High speed reads/writes
- Low pin count
- 32GB - 512GB
- BiCS FLASH™ 3D flash memory
- JEDEC standard
- 11.5 x 13mm 153 ball BGA package

e-MMC KEY FEATURES

- KIOXIA controller
- Parallel interface
- Easy adoption for SoC
- C Temp (-25C to 85C) 4GB - 128GB
- I temp (-40C to 105C) 8GB - 64GB
- BiCS FLASH™ 3D flash memory from 16GB
- JEDEC standard
- 11.5 x 13mm 153 ball BGA package (4GB also offered in 11x10mm package)

UFS Focus Products

- 32GB, 64GB, 128GB, 256GB, 512GB BiCS FLASH™ 3D flash memory


e-MMC Focus Products

- 4GB, 8GB MLC product
- 16GB, 32GB, 64GB, 128GB BiCS FLASH™ 3D flash memory product

KEY APPLICATIONS



Smartphones



AR/VR



Tablets/2-in-1



Automotive



Streaming Media



Smart Speakers

Contact your local KIOXIA sales representative or franchised distributor for additional information.

MANAGED FLASH | UFS

| | Part Number | Capacity | e-MMC Version | Max Data Rate (MB/s) | Supply Voltage | | | Operating Temp (°C) | Package (mm) |
|-----------------|-----------------|----------|---------------|----------------------|---------------------------|----------------------|-----------------------|---------------------|------------------|
| | | | | | V _{cc} (V) | V _{cca} (V) | V _{cco2} (V) | | |
| Consumer Grade | THGAF8G8T23BAIL | 32GB | 2.1 | 1160 | 2.7 to 3.6 | _ ¹ | 1.70 to 1.95 | -25 to 85 | 11.5 × 13 × 0.8 |
| | THGAF8G9T43BAIR | 64GB | | | | | | | 11.5 × 13 × 1.0 |
| | THGAF8T0T43BAIR | 128GB | | | | | | | |
| | THGAF8T1T83BAIR | 256GB | 3.0 | 2320 | 2.4 to 2.7, 2.7 to 3.6 | 1.14 to 1.26 | _ ² | -25 to 85 | 11.5 × 13 × 0.8 |
| | THGJCT0T44BAIL | 128GB | | | | | | | 11.5 × 13 × 0.95 |
| | THGJCT1T84BAIC | 256GB | | | | | | | |
| | THGJCT2T84BAIC | 512GB | 3.1 | 2320 | 2.4 to 2.7, 2.7 to 3.6 | 1.14 to 1.26 | _ ² | -25 to 85 | 11.5 × 13 × 0.8 |
| | THGJFAT0T44BAIL | 128GB | | | | | | | 11.5 × 13 × 1.0 |
| | THGJFAT1T84BAIR | 256GB | | | | | | | |
| THGJFAT2T84BAIR | 512GB | | | | | | | | |

(1) Dual-supply operation at V_{cc} and V_{cco2}; V_{cca} need not be supplied. (2) Dual-supply operation at V_{cc} and V_{cca}; V_{cco2} need not be supplied.

Note: While UFS performance is higher Ver 3.1 > 3.0 > 2.1, the SoC will likely determine which version UFS is required. JEDEC intends each UFS version to be backward compatible with previous versions, but please confirm by evaluating the power supply voltage and SoC.

MANAGED FLASH | e-MMC

| | Part Number | Capacity | e-MMC Version | Process | Max Data Rate (MB/s) | Supply Voltage | | Operating Temp (°C) | Package (mm) |
|------------------|-----------------|----------|---------------|-------------|----------------------|---------------------|----------------------------|-------------------------|-----------------|
| | | | | | | V _{cc} (V) | V _{cca} (V) | | |
| Consumer Grade | THGBMNG5D1LBAIT | 4GB | 5.0 | FG NAND | 400 | 2.7 to 3.6 | 1.70 to 1.95 2.7 to 3.6 | -25 to 85 | 11 × 10 × 0.8 |
| | THGBMNG5D1LBAIL | | | | | | | | 11.5 × 13 × 0.8 |
| | THGBMJG6C1LBAIL | 5.1 | | | | | | | |
| | THGBMJG7C1LBAIL | | 16GB | | | | | | |
| | THGBMJG8C2LBAIL | 32GB | 5.1 | BICS FLASH™ | 400 | 2.7 to 3.6 | 1.70 to 1.95 | -25 to 85 | 11.5 × 13 × 0.8 |
| | THGAMRG7T13BAIL | 16GB | | | | | | | |
| | THGAMRG8T13BAIL | 32GB | | | | | | | |
| | THGAMRG9T23BAIL | 64GB | | | | | | | |
| THGAMRT0T43BAIR | 128GB | | | | | | | | 11.5 × 13 × 1.0 |
| Industrial Grade | THGBMJG6C1LBAU7 | 8GB | 5.1 | FG NAND | 400 | 2.7 to 3.6 | 1.70 to 1.95 2.7 to 3.6 | -40 to 105 ¹ | 11.5 × 13 × 1.2 |
| | THGBMJG7C2LBAU8 | 16GB | | | | | | | |
| | THGBMJG8C4LBAU8 | 32GB | | | | | | | |
| | THGBMJG9C8LBAU8 | 64GB | | | | | | | |

(1) Tc=115°C max. Contact your KIOXIA sales representative for sample schedule

Definition of capacity: KIOXIA Corporation defines a megabyte (MB) as 1,000,000 bytes, a gigabyte (GB) as 1,000,000,000 bytes and a terabyte (TB) as 1,000,000,000,000 bytes. A computer operating system, however, reports storage capacity using powers of 2 for the definition of 1GB = 2³⁰ = 1,073,741,824 bytes and therefore shows less storage capacity. Available storage capacity (including examples of various media files) will vary based on file size, formatting, settings, software and operating system, such as Microsoft Operating System and/or pre-installed software applications, or media content. Actual formatted capacity may vary.